

# DynaSEALR X-series option guide


## Available add-on options for the DynaSEALR X-series models

NB: The pictures are only illustrative. The products may look different in reality.

	Model	RB	H	RRC	MA	VS	FS	SCS	ATB	
	X10-LTS	x		x					x	
	X10-LTR	x		x					x	
	X10-HTR	x	x	x	x		x	(std)		
	X10r-HTR	x	x	x	x		x	(std)		
	X12-HTR	x	x	x	x		x	(std)		
	X10-DUR	(std)	x	(std)	x	x	x			
	X10r-DUR	(std)	x	(std)	x	x	x			
	X12-DUR	(std)	x	(std)	x	x	x			
	X10-VMR	x	x	x			x			
	X12-VMR		x <sup>1</sup>	(std)	x	x	x <sup>1</sup>			
	X16-FM	x		x			(std) <sup>2</sup>	x		
	X16e-FM	x		x			(std) <sup>2</sup>	x		

<sup>1</sup> You can choose either Heating OR Fragment Shield

<sup>2</sup> 10 mm Fragment Shield is included as standard. Further strengthened FS is available as add-on option

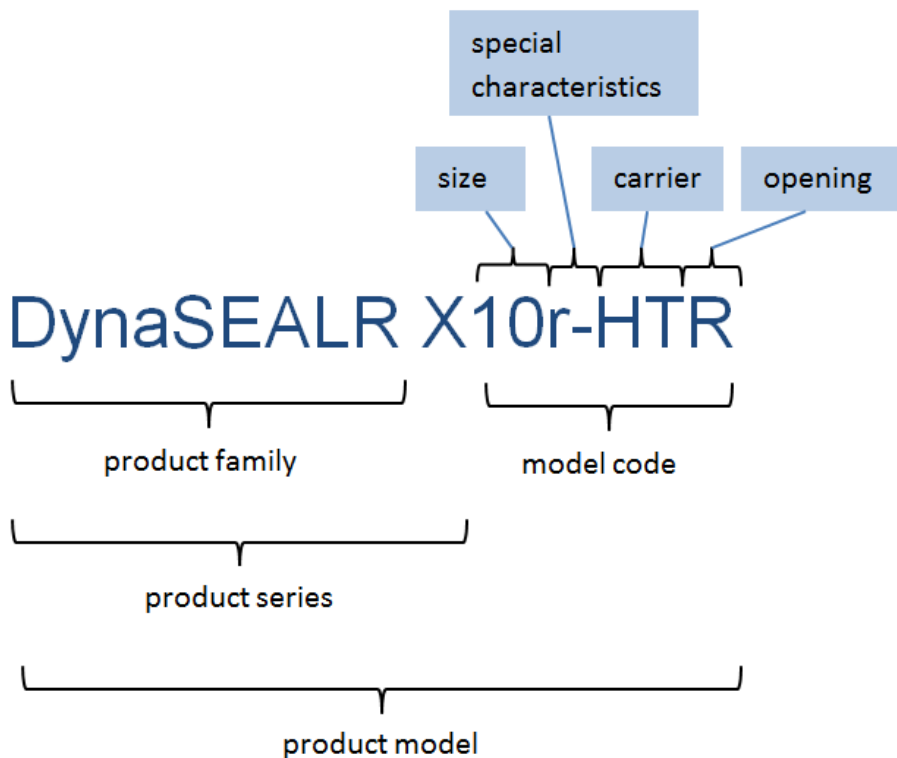

Size code	Special characteristics	Carrier code	Opening type
10	r = radiation shielded	LT = Light Trailer	S = Straight
12	e = extended	HT = Heavy Trailer	R = Rotating
16		DU = Drive Unit	H = Horizontal
		VM = Vehicle Mounted	
		CM = Container Mounted	
		FM = Frame Mounted	

Options
RB = Robot buttons
H = Heating
RRC = Radio Remote Control
MA = Manipulator arm
VS = Vision system
FS = Fragment shield
SCS = Shaped charge shield
ATB = Adjustable towbar



The content of this document is subject to change without prior notice or obligation. © 2012 Dynasafe